

**FIRST QUARTER 2010 DATA REPORT
FOR AMBIENT AIR MONITORING
ENERGY FUELS RESOURCES CORPORATION
URANIUM MILL LICENSING SUPPORT
PIÑON RIDGE MILL
MONTROSE COUNTY, COLORADO**

**August 31, 2010
Revision: 1**

Prepared By:



Energy Fuels Resources Corporation
44 Union Boulevard, Suite 600
Lakewood, Colorado 80228

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1.0 INTRODUCTION	1
2.0 PROGRAM DESCRIPTION AND MONITOR SITE DESCRIPTIONS	2
2.1 Ambient Air Monitoring Time Period	2
2.2 Selection of Monitoring Sites	2
2.3 Locations	3
3.0 DATA COLLECTION AND COMPLETENESS	4
3.1 Meteorological Data	4
3.2 PM ₁₀ Data	6
3.3 Radionuclide Data	7
4.0 METEOROLOGICAL DATA ANALYSIS	9
5.0 AIR QUALITY ANALYSIS.....	12
5.1 PM ₁₀ Data Summary	12
5.2 Radionuclides	13
6.0 QUALITY ASSURANCE PROGRAM	14
6.1 Quarterly Calibrations	14
6.2 Independent Quarterly Audit Program	14
6.3 Internal Quality Control Procedures	14
7.0 PERSONNEL	15
8.0 STANDARDS AND REFERENCES	17

FIGURES

- Figure 1 Site Layout
Figure 2 Air and Meteorological Site Location Map

TABLES

- Table 1 Monitor Site Locations
Table 2 Data Recovery for Meteorological Parameters
Table 3 Data Recovery for PM₁₀ Samples
Table 4 Data Recovery for Radionuclide Samples
Table 5 Monthly Average Meteorological Parameters
Table 6 PM₁₀ Concentrations
Table 7 Radionuclide Concentrations
Table 8 Roles and Responsibilities

APPENDICES

Appendix A	First Quarter 2010 Meteorological Data
Appendix B	First Quarter 2010 Particulate Matter Sampling Sheets
Appendix C	First Quarter 2010 PM ₁₀ Data
Appendix D	First Quarter 2010 Radionuclide Data
Appendix E	First Quarter 2010 EFR Ambient Air Systems Calibration Report
Appendix F	First Quarter 2010 IML Calibration and Quality Assurance Audit Report

1.0 INTRODUCTION

This quarterly report provides data required for the assessment of air quality. These data collected during the first quarter 2010 will be used to augment the environmental baseline study at Energy Fuels Resources Corporation (EFR) proposed Piñon Ridge Mill (the "Site") located in Montrose County, Colorado. Twelve months of meteorological and air quality data was collected from the second quarter 2008 to the first quarter 2009 and was subsequently summarized in the Meteorology, Air Quality and Climatology Report, revision 1, dated October 9, 2009 and prepared by Kleinfelder. Data were collected at five air monitoring stations (network). Three stations are located on-site and two stations are located in the vicinity of the site, one upwind and one downwind of the site, in order to obtain a representative block of data for assessment.

The project is under the regulation of the Colorado Department of Public Health and Environment (CDPHE) and the mill license (radioactive source materials license) will be issued and administered by CDPHE. Monitoring sites were chosen according to guidance outlined in Nuclear Regulatory Commission (NRC) Regulatory Guide (Reg. Guide) 3.63, Onsite Meteorological Measurement Program for Uranium Recovery Facilities – Data Acquisition and Reporting (NRC Reg. Guide 3.63); NRC Reg. Guide 4.14, Radiological Effluent and Environmental Monitoring at Uranium Mills (NRC Reg. Guide 4.14); and Environmental Protection Agency (EPA) Meteorological Monitoring Guidance for Regulatory Modeling Applications (MMGRMA) (EPA-454/R-99-005).

The Site is located 14 miles northwest of Naturita at 16910 Highway 90, Montrose County, Colorado. The property consists of approximately 880 acres that include the Southwest $\frac{1}{4}$ of the Southeast $\frac{1}{4}$ of Section 5, all of Section 8, the North $\frac{1}{4}$ of Section 17, and the Southeast $\frac{1}{4}$ of the Northwest $\frac{1}{4}$ of Section 17, Township 46 North, Range 17 West, of the New Mexico Principal Meridian. See Figure 1 for the site layout.

2.0 PROGRAM DESCRIPTION AND MONITOR SITE DESCRIPTIONS

2.1 Ambient Air Monitoring Time Period

Based on NRC Reg. Guides 3.63 and 4.14, pre-operational particulate matter air monitoring must occur for at least twelve months prior to the submittal of the radiation permit application. This data was presented in the Meteorology, Air Quality and Climatology Report submitted with the Radioactive Material License Application on November 18, 2009. Particulate matter ≤ 10 microns (PM_{10}) samplers are located at Sites 1 and 2 and are operated under EPA sampling protocol (see Figures 1 and 2 for monitoring site locations). Tisch Hi-Vol samplers are used to monitor radionuclides at all five monitoring locations.

This report summarizes the monitoring activities conducted during the first quarter 2010 and provides data collected between January 1 and March 31, 2010.

2.2 Selection of Monitoring Sites

Selection of air monitoring station locations was based on both the pre-operational and operational air monitoring criteria set forth in NRC Reg. Guide 4.14. Three monitoring locations were selected near the Site boundaries. A fourth location was selected as a background location to the northwest and a fifth location was selected at the nearest residence located to the southeast. Wind direction is predominantly from northwest and from the southeast depending on time of day due to the presence of a down-valley/up-valley flow through the area.

The five selected monitoring locations are discussed below:

Air Monitoring Site #1: This location is also referred to as Met Site #1 and is located near the northern boundary of the Site. This location includes the 10 meter (10m) meteorological tower, one of the two on-site PM_{10} monitoring locations, and an air monitor for radionuclide sampling.

Air Monitoring Site #2: This location is also referred to as Met Site #2 and is located near the eastern boundary of the Site. This location includes the 30 meter (30m) meteorological tower, one of the two on-site PM_{10} monitoring locations, and an air monitor for radionuclide sampling.

Air Monitoring Site #3: This location is also referred to as the West Site and is located near the western boundary of the Site. This location includes an air monitor for radionuclide sampling.

Air Monitoring Site #4: This location is also referred to as the Cooper Site and is located northwest of the Site. This site is assumed to be upwind. This site will be the background site following startup of operations. This location includes an air monitor for radionuclide sampling.

Air Monitoring Site #5: This location is also referred to as the Carver Site and is located southeast of the Site. This site is assumed to be a downwind site, and was chosen as the site of the nearest residence. This location includes an air monitor for radionuclide sampling.

2.3 Locations

The Site is located at 16910 Highway 90, Montrose County, Colorado. See Table 1 and Figures 1 and 2 for locations of the monitoring sites.

**Table 1
Monitor Site Locations**

Site ID	UTM Zone 12 (NAD83)	
	Easting	Northing
Site #1 (North Site) – 10m Tower	695211.43	4237487.24
Site #2 (East Site) – 30m Tower	695930.42	4235452.56
Site #3 (West Site)	694443.09	4235724.28
Site #4 (Cooper Site) – Upwind Resident	691782.99	4239297.89
Site #5 (Carver Site) – Downwind Resident	700135.95	4232939.27

3.0 DATA COLLECTION AND COMPLETENESS

According to the Prevention of Significant Deterioration (PSD) regulations, the data recovery goal for meteorological data is 90% data recovery per quarter so as to meet a 90 percent data recovery requirement for a year. The PSD data recovery goal for pollutant data is 80% per quarter so as to meet a 90 percent data recovery requirement for a year. The minimum annual acceptable data recovery for PM₁₀ data is 75% valid data.

3.1 Meteorological Data

Meteorological data were collected continuously at Sites #1 and #2 from January 1 to March 31, 2010 and are reported in Appendix A. EPA Air Quality System (AQS) data qualifiers were used to flag invalid data. Data qualifiers used for meteorological data this quarter include: BA – Maintenance/Routine Repairs, AQ – Collection Error, AT – Calibration, and IL – Seasonally Out of Service.

Daily, weekly, and monthly checks were performed on meteorological equipment at each site according to standard operating procedures (SOPs) presented in the Energy Fuels Resources Corporation Uranium Mill Licensing Support Ambient Air Monitoring Plan Piñon Ridge Mill Site, 2008.

Site #1 includes the 10m tower and the following parameters are measured based on EPA MMGRMA guidance:

- wind speed, wind direction, and sigma theta
- vertical wind speed,
- temperature,
- relative humidity,
- delta temperature,
- barometric pressure,
- solar radiation,
- precipitation, and
- evaporation.

At the 10m level, wind speed, wind direction, sigma theta, vertical wind speed, and delta temperature are measured. At the 2m level, temperature, relative humidity, delta temperature, barometric pressure, and solar radiation are measured. At the ground level, precipitation and evaporation are measured.

Evaporation data is scheduled for collection between April 1 and October 31 of each year. The Evaporation Pan was not operated during the first quarter 2010. The IL data qualifier was used for the period when the evaporation pan was out of service for the season.

Site #2 includes the 30m tower and the following parameters are measured based on EPA MMGRMA guidance:

- wind speed, wind direction, and sigma theta,
- vertical wind speed,
- temperature,
- relative humidity,
- delta temperature,
- barometric pressure, and
- solar radiation.

At the 30m level, wind speed, wind direction, sigma theta, vertical wind speed, and delta temperature are measured. At the 2m level, temperature, relative humidity, delta temperature, barometric pressure, and solar radiation are measured.

Sigma theta values for both sites are calculated from wind monitor readings. Wind gusts are measured at both of the sites. The measurement indicates the speed of the gust based on a 3-second average of the wind speed, along with the gust direction and time of the gust.

Data recovery was calculated for each parameter at both of the meteorological sites. As shown in Table 2, data completeness at Site 1 was between 95.0 and 99.9 percent for all parameters. Data recovery at Site 2, also shown in Table 2, was between 98.8 and 99.9 percent for all parameters. All parameters at both sites exceeded the 90 percent data recovery goal.

**Table 2
Data Recovery for Meteorological Parameters**

Meteorological Parameter	Data Recovery Site #1	Data Recovery Site #2
Wind Speed	97.7%	98.8%
Wind Direction	97.7%	98.8%
Sigma Theta Wind	97.7%	98.8%
Vertical Wind Speed EPS Avg	96.9%	99.9%
Vertical Wind Speed EPS Std	96.9%	99.9%
Vertical Wind Speed CFT Avg	95.0%	99.9%
Vertical Wind Speed CFT Std	95.0%	99.9%
2m Temperature	99.9%	99.9%
10m Temperature	99.9%	N/A
30m Temperature	N/A	99.9%
DeltaT Avg	99.9%	99.9%
Precipitation Total	99.7%	N/A
Relative Humidity Avg	99.9%	99.9%
RH Temperature Avg	99.9%	99.9%
Barometric Pressure	99.9%	99.9%
Solar Radiation Avg	99.9%	99.9%
Evaporation Level Avg	N/A	N/A
Gust Speed	97.7%	98.8%
Gust Direction	97.7%	98.8%
Gust Time	97.7%	98.8%

N/A – Not Applicable. Sensors for 10-meter Temperatures, Evaporation, and Precipitation were not installed at Site 2. Sensors for 30-meter Temperature were not installed at Site 1.

3.2 PM₁₀ Data

PM₁₀ data were collected at two of the five monitoring sites (Site 1 and Site 2) following the EPA Ambient Particulate Monitoring Sample Day Schedule for 1-in-6 day sampling. PM₁₀ filters were collected from the PM₁₀ monitors as soon as practical following the sampling day. The samples were placed in re-sealable plastic bags immediately following collection and stored in a secured location. The samples were shipped to Inter-Mountain Laboratories (IML) on a monthly basis under standard chain-of-custody procedures. IML analyzed the samples in accordance with their standard operating procedures (SOPs). Refer to Appendices B and C for sampling sheets and IML analytical data, respectively.

Due to operator programming error at Site #1 on February 19, 2010, the sampler did not collect a sample on the scheduled day. A make-up sample was collected on February 20, 2010 and a notification letter of the make-up sample was sent to CDPHE.

Daily, weekly, and monthly checks were performed on the Partisol PM₁₀ monitors at each site according to SOPs presented in the Energy Fuels Resources Corporation Uranium Mill Licensing Support Ambient Air Monitoring Plan Piñon Ridge Mill Site, 2008.

Data recovery was calculated for each site. Both Site 1 and Site 2 had 100 percent data recovery. Each site exceeded the 75 percent requirement for data recovery (Table 3).

**Table 3
Data Recovery for PM₁₀ Samples**

	Site 1	Site 2
Total Number of Samples per Quarter	15	15
Number of Valid Samples Collected	15	15
Data Recovery	100%	100%

3.3 Radionuclide Data

Filters for radionuclide data analysis were collected at each of the five monitoring sites (Sites 1, 2, 3, 4, and 5). High-volume (Hi-Vol) monitors were run continuously on a 14-day filter exchange schedule. Filters were collected and immediately placed in sample filter envelopes and into re-sealable plastic bags and stored in a secured location. The samples were shipped to ACZ Laboratories (ACZ) at the end of the quarter under standard chain-of-custody procedures. ACZ composited the sample filters by quarter and analyzed the samples in accordance with their SOPs. Refer to Appendices B and D for sampling sheets and ACZ analytical data, respectively.

ACZ Labs reports a concentration of analyte per composited filter set. The average air flow rate was calculated for each filter exposure period based on the calibration values of the samplers and average stagnation pressure, temperature and pressure during the filter exposure period. The formula used to calculate the average air flow is:

$$\text{Average Flow Rate (m}^3\text{/min)} = \frac{\left(\frac{P_a - P_{\text{stag}}}{P_a} - b \right)}{m} \times \sqrt{T_a + 273.15}$$

Where:

P_a = Average ambient pressure (inches Hg) (averaged over individual filter exposure periods)

T_a = Average ambient temperature (°C) (averaged over individual filter exposure periods)

P_{stag} = Average stagnation pressure (inches Hg) (measured at sample start and end)

b = Sampler calibration intercept value (unitless)
m = Sampler calibration slope value (unitless)

The air sample volume for each filter was calculated based on the average flow rate and time of exposure and the total air volume for each composited sample was calculated as the sum of the air sample volume of each filter included in the composite. Refer to Appendix D for a summary of the above calculations.

Daily, weekly, and monthly checks were performed on the Tisch Hi-Vol monitors at each site according to SOPs presented in the Energy Fuels Resources Corporation Uranium Mill Licensing Support Ambient Air Monitoring Plan Piñon Ridge Mill Site, 2008.

Data recovery was calculated for each of the five sites and ranged from 95.7 to 99.9 percent and is summarized in Table 4. All five sites had data recovery that exceeded the 80 percent data recovery goal for pollutant data.

Table 4
Data Recovery for Radionuclide Samples

	Site 1	Site 2	Site 3	Site 4	Site 5
Total Run Time (hours)	2152.0	2153.5	2155.1	2158.0	2159.6
Actual Run Time (hours)	2149.5	2147.5	2063.1	2156.6	2151.5
Data Recovery	99.9%	99.7%	95.7%	99.9%	99.6%


4.0 METEOROLOGICAL DATA ANALYSIS

The monthly averages of meteorological parameters are summarized in Table 5.


**Table 5
Monthly Average Meteorological Parameters**

Meteorological Parameter	January		February		March	
	Site #1	Site #2	Site #1	Site #2	Site #1	Site #2
Wind Speed (m/s)	1.57	1.27	1.62	1.33	2.88	2.67
Wind Direction (deg)	204.70	250.90	235.38	262.49	223.81	249.86
Sigma Theta Wind	29.10	26.53	25.91	24.72	26.91	27.70
Vertical Wind Speed EPS (cm/s)	0.72	1.52	0.92	2.77	2.31	7.65
Vertical Wind Speed EPS Std	9.07	10.85	9.79	9.49	19.18	30.84
Vertical Wind Speed CFT (cm/s)	3.44	5.32	2.10	4.61	6.40	13.66
Vertical Wind Speed CFT Std	9.75	12.43	10.69	10.35	21.49	35.23
2m Temperature (°C)	-4.88	-4.25	-1.81	-2.04	4.13	4.07
10m Temperature (°C)	-3.86	N/A	-1.25	N/A	4.53	N/A
30m Temperature (°C)	N/A	-2.99	N/A	-0.91	N/A	4.77
DeltaT (°C)	1.02	1.26	0.56	1.14	0.40	0.70
Relative Humidity (%)	75.56	72.83	75.57	72.65	58.65	56.77
RH Temperature (°F)	24.37	25.57	29.70	29.71	40.01	40.16
Barometric Pressure (in. Hg)	24.63	24.55	24.56	24.47	24.56	24.48
Solar Radiation (W/m ²)	109.86	106.69	140.18	137.54	202.18	200.66
Gust Speed (m/s)	3.30	3.01	3.28	2.94	5.93	5.84
Gust Direction (deg)	205.84	265.83	251.78	278.05	237.68	254.38
Total Precipitation (in.)	1.13	N/A	1.19	N/A	1.89	N/A
Total Evaporation (in.)	N/A	N/A	N/A	N/A	N/A	N/A
Average Daily Evaporation (in.)	N/A	N/A	N/A	N/A	N/A	N/A

The wind roses for Sites 1 and 2 are shown below. As can be seen in the Site 1 wind rose below, the wind direction at the 10 m tower site (Site 1) is predominantly from the southeast, with less frequent, yet still prominent west and northwest components. The southeast/northwest wind directions depict the down-valley/up-valley flow through the area. The wind direction at the 30m tower site (Site 2 wind rose, below) is distributed predominantly from the west with a significant southwest and northwest components.

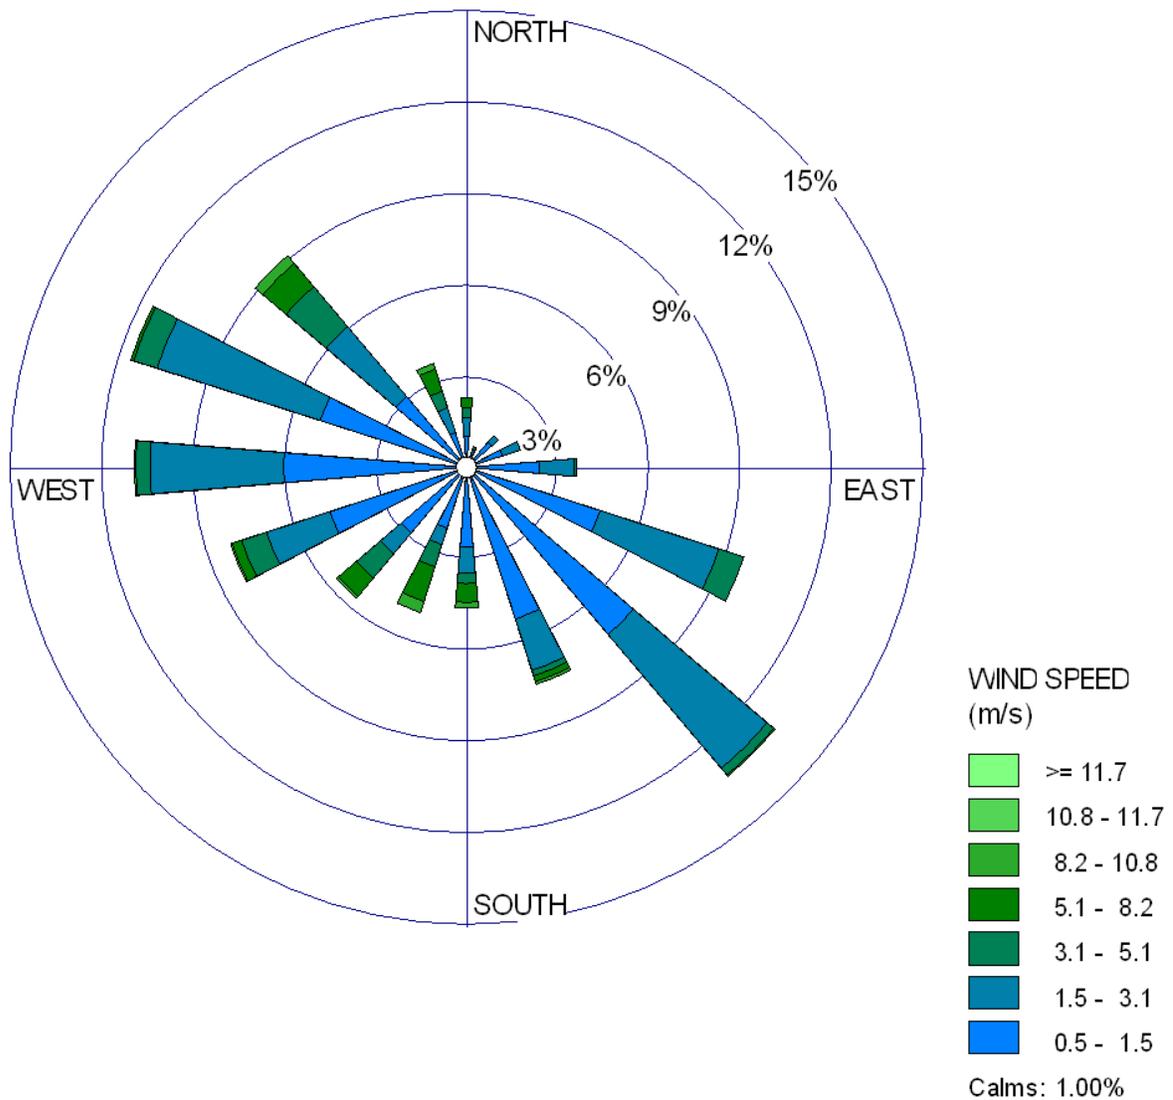

Site 1: 10m Wind Rose

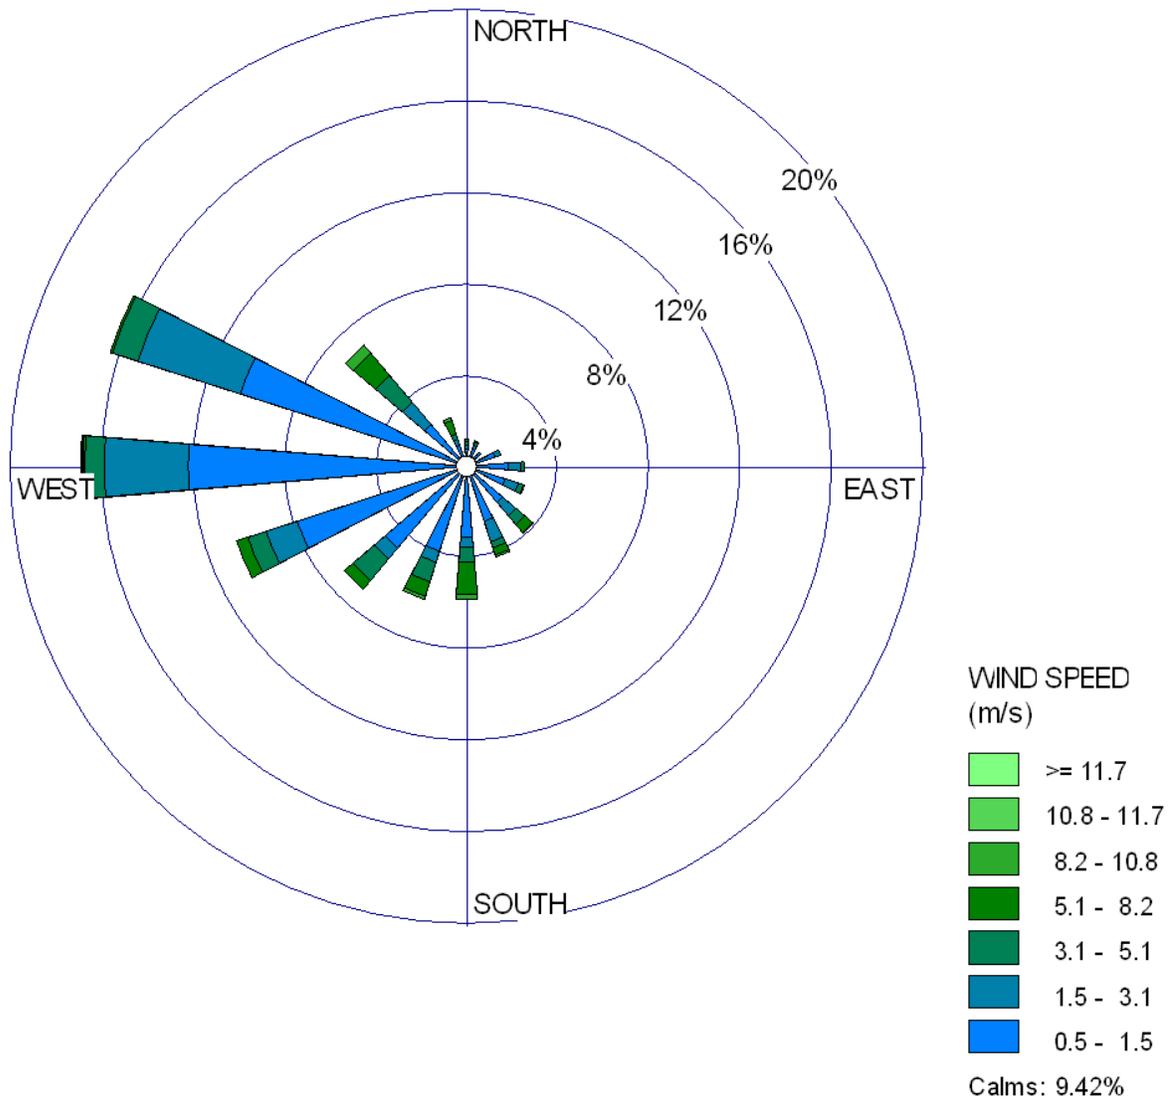

Site 2: 30m Wind Rose

5.0 AIR QUALITY ANALYSIS

The EFR Monitoring Program collected data to examine both PM₁₀ and radionuclide trends at the Mill Site. Mill Site area concentrations were calculated from the data at the monitoring sites and the results were less than federal and state standards and recognized national averages.

5.1 PM₁₀ Data Summary

The PM₁₀ concentrations are summarized in Table 6. The results summarized in Table 6 are provided in both standard temperature and pressure (STP) and local (or actual) temperature and pressure (LTP). Reporting of PM₁₀ data is required to be in LTP. The monthly and annual averages are presented in Table 6.

Table 6
PM₁₀ Concentrations

Sample Date	STP Concentration ($\mu\text{g}/\text{m}^3$)		LTP Concentration ($\mu\text{g}/\text{m}^3$)	
	Site #1	Site #2	Site #1	Site #2
January 2, 2010	3	3	3	3
January 8, 2010	4	3	4	3
January 14, 2010	6	5	5	5
January 20, 2010	3	3	3	2
January 26, 2010	3	3	3	3
February 1, 2010	4	4	4	4
February 7, 2010	3	2	2	2
February 13, 2010	3	4	3	3
February 19, 2010	4	4	4	4
February 25, 2010	4	4	3	3
March 3, 2010	5	5	4	4
March 9, 2010	3	3	3	3
March 15, 2010	3	3	3	3
March 21, 2010	6	6	6	6
March 27, 2010	4	4	3	3
January Average	4	3	4	3
February Average	4	4	3	3
March Average	4	4	4	4

NC – Not Collected

5.2 Radionuclides

The first quarter 2010 radionuclide monitoring data for EFR Sites 1, 2, 3, 4, and 5 are presented in Table 7. The samples for each site were collected continuously throughout the quarter and were analyzed for concentrations of Uranium, Lead-210, Radium-226, and Thorium-230.

Table 7
Radionuclide Concentrations

EFR Sites	Uranium	Lead-210	Radium-226	Thorium-230
	(µg/liter)	(pCi/liter)	(pCi/liter)	(pCi/liter)
Site 1	$<6.7 \times 10^{-9}$	3.7×10^{-6}	-1.1×10^{-9}	-1.0×10^{-8}
Site 2	$<6.8 \times 10^{-9}$	6.8×10^{-6}	-8.2×10^{-10}	4.1×10^{-10}
Site 3	$<7.0 \times 10^{-9}$	6.1×10^{-6}	3.4×10^{-9}	5.2×10^{-9}
Site 4	$<6.7 \times 10^{-9}$	5.1×10^{-6}	-9.4×10^{-10}	-8.7×10^{-9}
Site 5	$<6.7 \times 10^{-9}$	4.7×10^{-6}	-1.9×10^{-9}	6.0×10^{-9}

As shown in Table 7, some radionuclides have results less than zero. The negative concentrations are a result of quality control procedures by the analyzing laboratory. Occasionally, field samples have a lower radionuclide count than the laboratory blank sample used to set the “zero” point, thus, some samples have a negative concentration. Presenting negative concentrations rather than data qualifiers allows for temporal trend analysis of the data and is consistent with Section 7.5 of the NRC Reg. Guide 4.14. Therefore, the negative concentrations presented in Table 7 are an acceptable representation of the radionuclide concentrations collected in the Mill Site Area.

6.0 QUALITY ASSURANCE PROGRAM

6.1 Quarterly Calibrations

Calibrations were performed on particulate matter equipment on January 16 and 19, 2010 by EFR personnel. A copy of the EFR Calibration Report is included in Appendix E. Calibrations of meteorological instruments were performed on January 27, 2010 by IML personnel. A copy of the IML Calibration and Quality Assurance Audit Report is included in Appendix F.

6.2 Independent Quarterly Audit Program

Independent auditing on the particulate matter equipment was performed by IML on January 27, 2010. Audits of meteorological instruments are performed semi-annually and were not performed in the first quarter 2010.

6.3 Internal Quality Control Procedures


In the event of any operational errors or missed sampling events, a corrective action procedure is implemented. The quality assurance manager for the site will investigate the cause and effect of the incident, take corrective action, and prepare a letter to the CDPHE Air Pollution Control Division (APCD) and the Radiation Management Unit (RMU), as necessary.

7.0 PERSONNEL

Project staff and their respective roles are detailed in Table 8. The overall project organization is shown schematically in the Project Organization Chart below.

Program administration, management, and quality assurance is performed by Energy Fuels Resources personnel. The Air Monitoring Team Leader will provide onsite oversight and will assist the field team with technical, operational, or other project-related issues. Meteorological equipment calibrations and audits and ambient air monitoring audits are performed by IML Air Science. Technical support is provided by Kleinfelder West, Inc (KLF).

Project Organization Chart

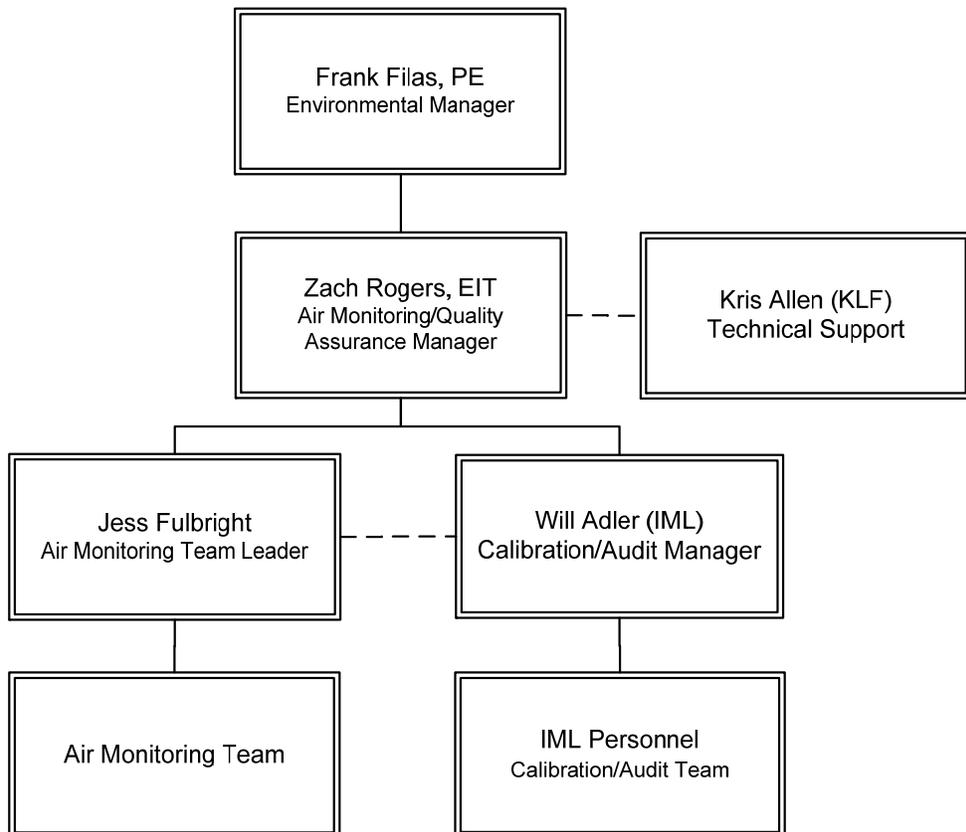

**Table 8
Roles and Responsibilities**

Name	Project Role	Responsibilities	Experience
Frank Filas, PE	Environmental Manager	Program Management	Engineering, Licensing, Operations Management
Zach Rogers, EIT	Air Monitoring/Quality Assurance Manager	Project Management, Quality Assurance, Report Preparation	Project Management, Field Operations, Air Quality, Quality Control, Meteorology
Jess Fulbright	Air Monitoring Team Leader/ Health & Safety Officer	Field Operations Management, Sampling, Health & Safety Compliance	Field Operations, Health & Safety Compliance
EFR Personnel	Air Monitoring Team	Sampling	Field Operations
Will Adler (IML)	Calibration/Audit Project Manager	Project Management, Field Work/Calibration/Audit	Project Management, Meteorology, Air Quality, Ambient Air Quality Modeling
IML Personnel	Calibration/Audit Team	Field Calibrations and Audits	Meteorology, Air Quality, Ambient Air Quality Modeling
Kris Allen, EIT (KLF)	Technical Support	Field Management, Air Quality Project Management	Air Quality, Field Management, Meteorology

8.0 STANDARDS AND REFERENCES

Colorado Department of Public Health and Environment (CDPHE), 2001. Ambient Air Monitoring Requirements for the Air Pollution Control Division of the Colorado Department of Public Health and Environment, Technical Services Program Air Pollution Control Division, April.

Energy Fuels Resources Corporation, 2008. Work Plan for Ambient Air Monitoring, Piñon Ridge Mill Site, July 18.

Environmental Protection Agency (EPA), 2000. Meteorological Monitoring Guidance for Regulatory Modeling Applications (MMGRMA) (EPA-454/R-99-005).

EPA, 2008. Quality Assurance Handbook for Air Pollution Measurements Systems, Vol. II, Part 2, USEPA, EPA-454/B-08-003, Environmental Monitoring Systems Laboratory.

EPA, 1995. Quality Assurance Handbook for Air Pollution Measurement Systems. Vol. V, Meteorological Measurements. EPA/600/R-94/038d, U.S. Environmental Protection Agency, Research Triangle Park, NC.

EPA, 2008. Quality Assurance Handbook for Air Pollution Measurement Systems. Volume IV: Meteorological Measurements Version 2.0 (Final). EPA-454/B-08-002, U.S. Environmental Protection Agency, Research Triangle Park, NC.

Kleinfelder West, Inc., 2009. Meteorology, Air Quality and Climatology Report, revision 1. October 9.

U.S. Nuclear Regulatory Commission Regulatory Guide, Office of Standards Development, Regulatory Guide 4.14 – Radiological Effluent and Environmental Monitoring at Uranium Mills, Revision 1, April 1980.

U.S. Nuclear Regulatory Commission Regulatory Guide, Office of Standards Development, Regulatory Guide 3.8 – Preparation of Environmental Reports for Uranium Mills, Revision 2, October 1982.

U.S. Nuclear Regulatory Commission Regulatory Guide, Office of Nuclear Regulatory Research, Regulatory Guide 3.63 – Onsite Meteorological Measurement Program For Uranium Recovery Facilities – Data Acquisition and Reporting, March 1988.