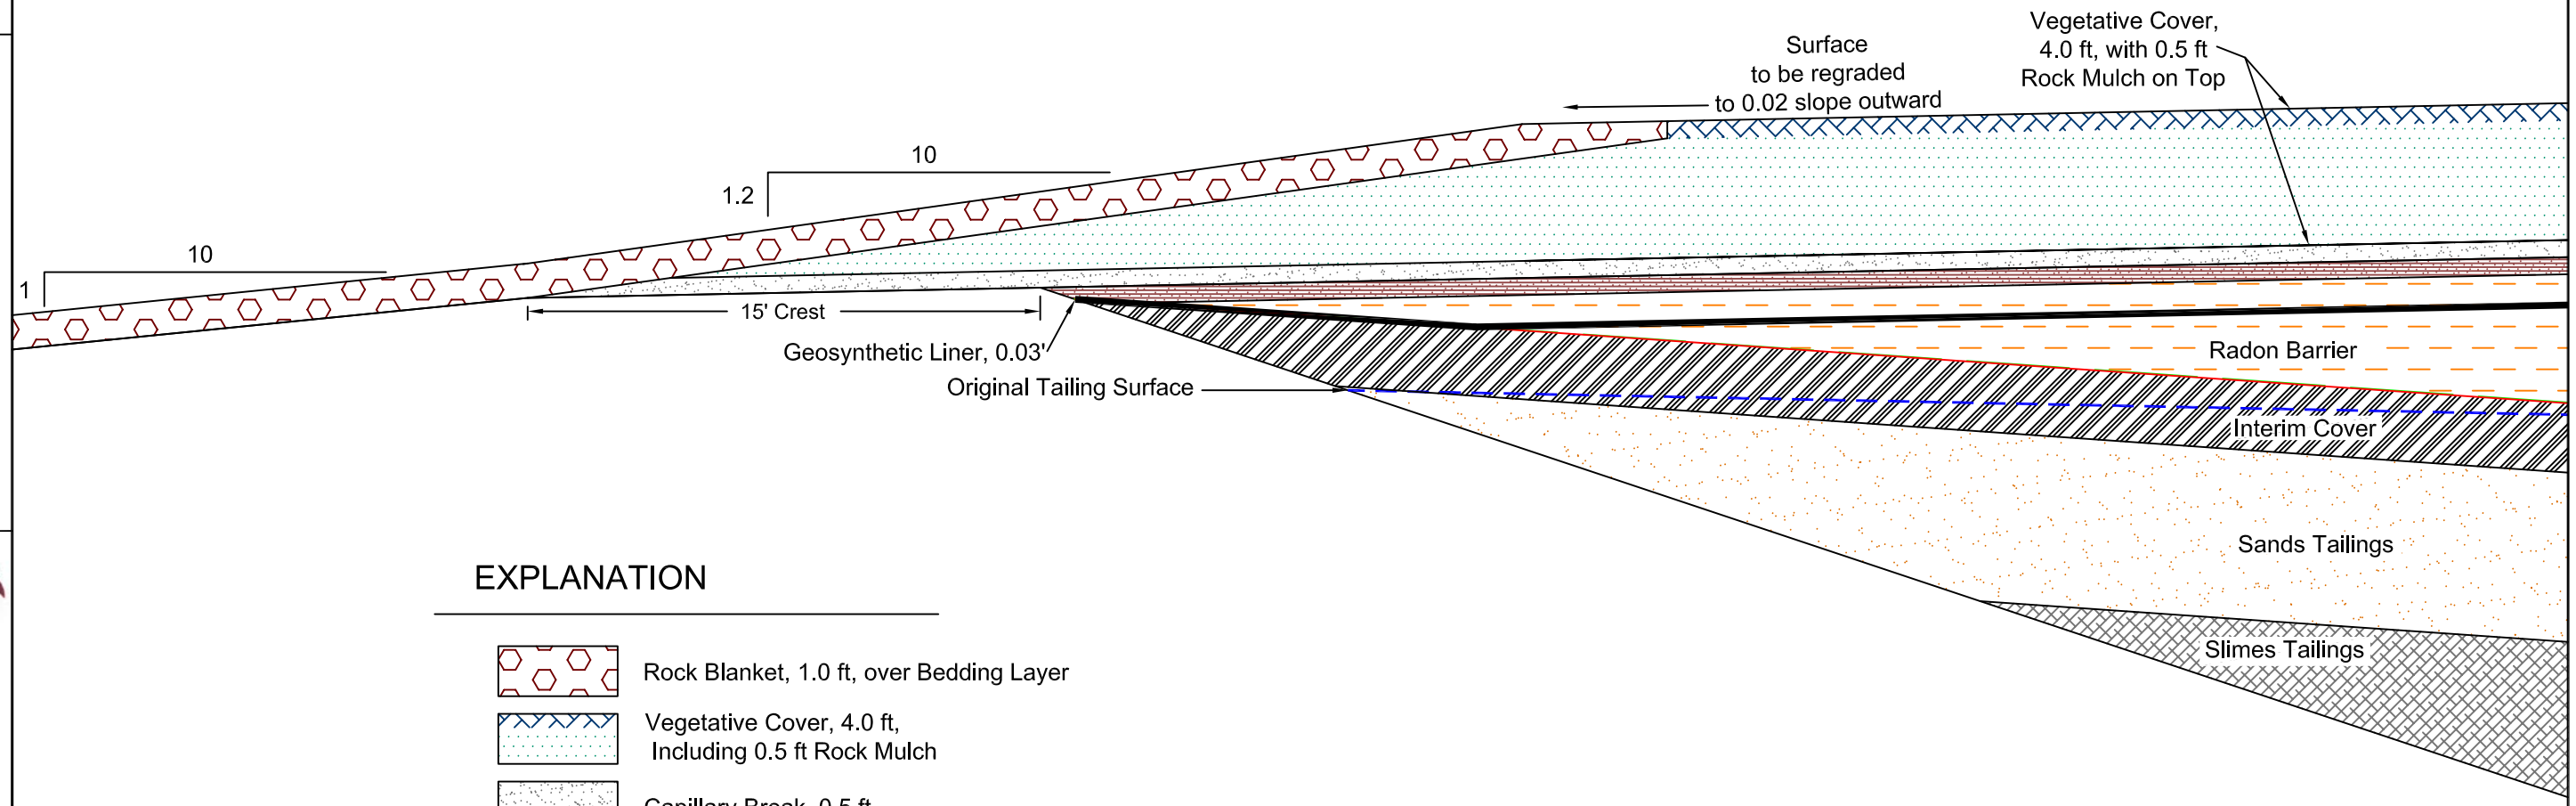

EXPLANATION

- Rock Blanket, 1.0 ft, over Bedding Layer
- Vegetative Cover, 4.0 ft, Including 0.5 ft Rock Mulch
- Capillary Break, 0.5 ft
- Bio-intrusion Layer, 0.5 ft
- Radon Barrier, 0.9 to 5.7 ft
- Geosynthetic Liner, 0.03 ft
- Interim Cover, 2.0 ft
- Sands Tailings, 0.0 to 5.0 ft
- Slimes Tailings, 0.0 to 10.0 ft

NOTES:

(1) ORIGINAL TAILING SURFACE IS THE ESTIMATED FINAL SURFACE OF TAILINGS AT CESSATION OF TAILING CELL OPERATION (GOLDER, 2008b).

5 0 2.5 5 ft
SCALE: 1 inch = 5 feet

The information included on this graphic representation has been compiled from a variety of sources, which have not been independently verified by Kleinfelder. Subsequently, Kleinfelder makes no representations or warranties, express or implied, as to accuracy, completeness, timeliness, or rights to the use of such information. This document is not intended for use as a land survey product or a construction design document. The use or misuse of the information contained on this graphic representation is at the sole risk of the party using or misusing the information.

DESIGNED BY: AKK
DRAWN BY: PD
CHECKED BY: CV
DATE: SEP 2010
SCALE: AS SHOWN

TYPICAL SECTION TAILING COVER AT MARGIN OF CELL

PIÑON RIDGE PROJECT
MONTROSE COUNTY, COLORADO

Energy Fuels Resources
44 Union Blvd., Suite 600
Lakewood, CO 80228
PH. 303.974.2140

FIGURE 2
REVISION 1

KLEINFELDER
Bright People. Right Solutions.
www.kleinfelder.com

PROJ. NO. 83088
ACAD FILE: ClosureCover_CellX2_1.dwg